


PACC SERIES AIR CURTAINS

PACC SERIES Cross Flow Type



PACC-H Series Cross Flow Type with Ceramic Heater

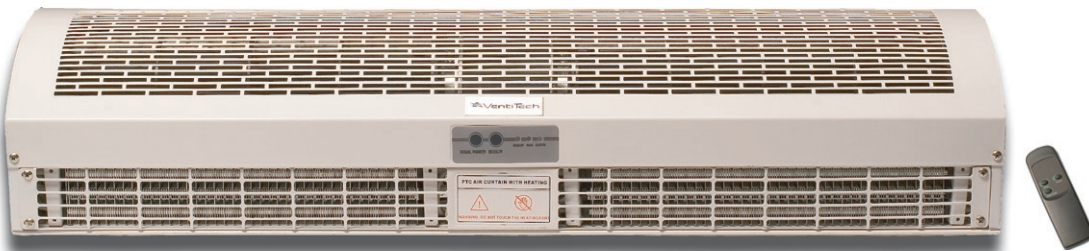

Air Curtains are designed for installation in the doorways of shops, office buildings, hotels, restaurants, clinics and hospitals.

Air Curtains save energy by reducing heating or cooling loss through the doorway by as much as 90%.

Air Curtains are hygienic keeping out insects unpleasant smells and dust from entering the doorway.

Pacc Series - Cross Flow Type

Pacc Series - Cross Flow Type with Ceramic Heater

- Durable metal casing
- Fan Wheel material selections
 - Fibreglass
 - Aluminium alloy
- 2 Fan Speed (Hi & Lo)
- Large Air Volume
- Low Noise level
- Remote Control Handset
- Available with swing-switch control or soft-touch button control or microprocessor control.

**FOR FURTHER INFORMATION CONTACT OUR SALES & TECHNICAL SUPPORT
TOLL FREE 1300 138 688**

SALES & TECHNICAL SUPPORT

HEAD OFFICE
Bradflo Pty Ltd
20 Garland Avenue,
North Albury NSW 2640
T (02) 6058 6900
F (02) 6058 6928
E: enquiries@bradflo.com

Canberra
Unit 3, 1, 5 Dairy Road
Fyshwick ACT 2609
T (02) 6239 3400
F (02) 6239 2404
E: canberra.sales@bradflo.com

Riverina
920 Metry Street,
Albury NSW 2640
T (02) 6040 6034
F (02) 6040 6035
E: riverina.sales@bradflo.com

Melbourne
7 Rusdale Street,
Knoxfield VIC 3180
T (03) 9764 9656
F (03) 9764 9661
E: melbourne.sales@bradflo.com

Sydney
5-7 Salisbury Street,
Silverwater NSW 2128
T (02) 9735 7000
F (02) 9735 7011
E: sydney.sales@bradflo.com

Brisbane
5/41 Lysaght Street
Acacia Ridge QLD 4110
T (07) 3216 9611
F (07) 3216 9477
E: brisbane.sales@bradflo.com

TOLL FREE 1300 138 688

www.bradflo.com



PACC SERIES

AIR CURTAIN APPLICATION

Air Curtains prevent air from entering a conditioned environment such as a heated or air conditioned room. By generating an evenly distributed laminar air flow over an entryway, air curtains seal in heated or refrigerated air and repel insects and wind borne contaminants such as dust, fumes and pollutants. Save energy by preventing the loss of conditioned air.

Air Curtains provide an ideal, cost effective solution in places where an entrance door or service window is continually in use or left open for extended periods of time.

PACC SERIES

CROSS FLOW TYPE




SPECIFICATIONS

MODEL		PACC 3009	PACC 3010	PACC 3012	PACC 3015	
Air flow (Hi)	M/h	1220	1450	1710	2230	
Air velocity (M/sec.)	Hi	11	11	11	11	
	Lo	9	9	9	9	
Air throw	Meters	2.5 ~ 3.0				
Noise level dB(A) @ 1M	Hi	57	58	59	60	
	Lo	55	56	57	58	
Power input (W)	Hi	160	200	230	300	
	Lo	110	140	150	200	
Power supply	V/Ph/Hz.	230/1/50				
Control		REMOTE CONTROL HANDSET				
Dimensions	H	mm	221	221	221	221
	W	mm	900	1000	1200	1500
	D	mm	183	183	183	183
Net Weight	Kg	13.5	14.6	17.0	22.4	

PACC H SERIES

CROSS FLOW TYPE WITH CERAMIC HEATER

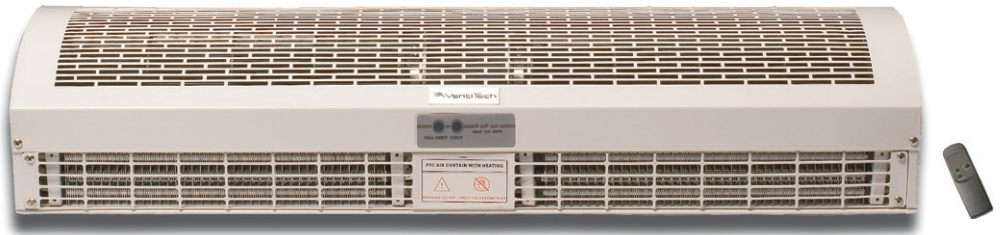

SPECIFICATIONS

MODEL		PACC 09-HS	PACC 10-HS	PACC 12-HS	PACC 15-HS	
		PTC CERAMIC HEATER				
Air flow	M/h	912	1040	1280	1670	
Air velocity	M/sec.	6.5 ~ 7.5				
Air throw	M	2.3 ~ 3.0				
Noise level @ 1M	dB(A)	64	65	67	69	
Heater power	W	6000	6600	7200	9000	
Motor power	W	160	200	230	300	
Power supply	V/Ph/Hz.	230/1/50				
Control		REMOTE CONTROL HANDSET				
Dimensions	H	mm	221	221	221	221
	W	mm	900	1000	1200	1500
	D	mm	183	183	183	183
Net Weight	Kg	15.1	16.0	18.2	22.9	

SALES & TECHNICAL SUPPORT - TOLL FREE 1300 138 688

Proudly distributed by:

